



***PS7000***  
***Pressure Sensor***

## Description

The enhanced features and performance of the new PS7000 pressure sensor provides users with an affordable solution to a wide range of water level and pressure monitoring applications. The PS7000 has a standard, 2 wire, loop powered 4-20mA output with an option for 0-2.5Vdc. New features include the ability of the user to re-range the sensor, as well as adjust the fluid density and gravity to suit specific applications.

The sensor is ideal for use in groundwater, surface water and a wide range of water monitoring and environmental projects. A durable corrosion resistant body, rugged ceramic capacitance transducer and double O ring sealing ensures suitability for harsh environment applications. The sensor comes fitted with a moulded polyurethane cable as standard. Other cable options are also supported. An optional SDI-12 adaptor can provide a serial output for external controllers or data loggers.

The sensor can be supplied in various gauge (vented) or absolute (non vented) pressure ranges. Gauge sensors utilise a closed vent system (CVS). This provides barometric pressure venting of the sensor, without the need to continually replace desiccant.

The PS7000 sensor is easy to install and provides users with a rugged and reliable solution to long term monitoring. For more information please contact your nearest sales office.

## Features

- Loop powered – battery or solar
- 4-20mA or 0-2.5Vdc outputs
- 0.1% FS accuracy
- Field re-ranging
- User inputs for fluid density and gravity
- Double O-ring design and moulded cable gland
- ½" diameter ceramic capacitance transducer
- Long term stability better than 0.2% per annum
- User selectable averaging
- Optional SDI-12 adaptor for process applications
- Threaded fitting for Process connection.


## Benefits

- Robust 316 stainless steel body material for harsh environments
- No need for regular desiccant replacement resulting in fewer field visits
- Low cost of ownership and minimal maintenance
- Ease of use and long term reliability.

## Applications

- Sewer wet wells
- Bore hole monitoring
- River and dam level monitoring
- Flood warning systems
- Tank level monitoring
- Process level and pressure monitoring

## Dimensions

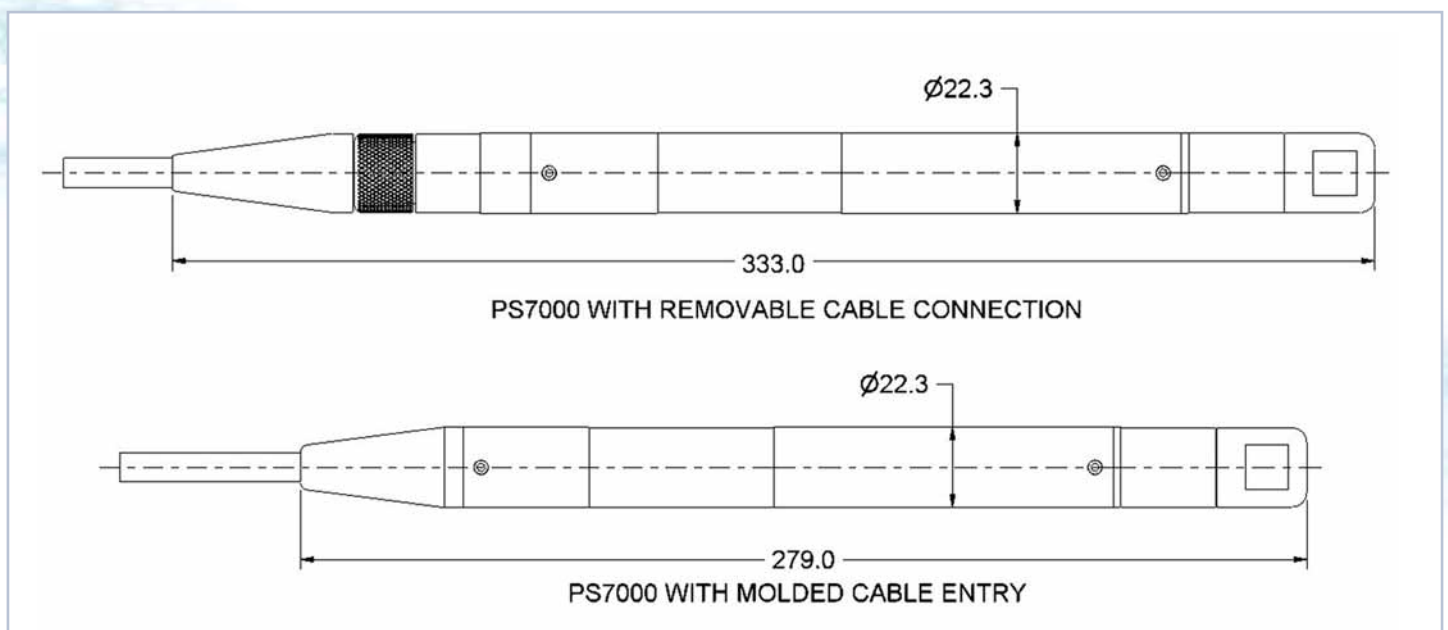

## PS7000 Specification

Measurement Technique		½" Ceramic Capacitance Transducer
Std ranges available	Gauge	2.5, 5, 10, 20, 40, 75, 100m
	Absolute	20, 40, 75, 100m
Other Ranges available		Yes (consult sales office)
Sensor Output		4-20mA, or optional 0-2.5V dc
Overall Accuracy (combined linearity, hysteresis and repeatability)		+/- 0.1% Full Scale
Long Term Stability		0.2% Full Scale per annum
Zero Offset and full scale maximum variation		+/-0.02mA
Cable Type		Polyurethane sheathed cable, OD 8mm, with 3mm vent tube, moulded entry, bare wire connection
Cable Lengths		10,20,30,50,100,150m (32,65,100,165,325,490 ft)
Closed Vent System (CVS)		Gauge Sensors must be fitted with a CVS Closed Vent System
Power Supply		8 to 30Vdc (at sensor) Loop Powered
Reverse Polarity Protection		Yes
Surge Current Protected		To 2kV
Warm up time to stable reading		<150 ms
Current Consumption		Up to 20mA while turned On, 0mA when Off.
Operating Temperature		0-50°C
Storage Temperature		-5°C - +60°C
Max Over Pressure		At least twice the full scale range
Dimensions (L x OD)		283mm x 22.5mm (12" x 1.7/8")
Weight		300g plus cable weight (665g per 10m length)
Wetted Materials		Ceramic, 316 Passivated Stainless Steel, Polyurethane, Viton
Process Connection		1/4" BSP Female (remove nose cover)

## Optional Extras and Accessories

- For all Gauge (vented) Sensors, a Closed Vent System must also be fitted. (each CVS unit can handle up to 70m of vented cable)
- Sensors are normally supplied with a moulded cable pre cut to required length. Detachable cable options may be available \*
- Protective Cooper Nose Cone (Part No 492-0241) – prevents marine & biological growth on sensor face.\*
- Serial Breakout Box (Part No 7BB-1000) – provides user field adjustments and calibration \*
- SDI12 Adaptor Unit –(Part No 7SDI-1000) provides 3 wire SDI12 serial output for Data Logger \*



## How to Order

The following information will be required:

- Sensor Full Scale Range (specify range in m)
- Sensor Type (Gauge or Absolute)
- Output Required (4-20mA or 0-2.5V)
- Moulded Cable length (specify length in m)
- Closed Vent System (for Gauge Sensors)
- Accessories (Nose Cone, Breakout Box, SDI12 Box)\*

\* Consult your Greenspan sales representative for further details.



#### **Australia**

Head Office  
Goyen Controls Co Pty Ltd  
268 Milperra Road  
Milperra, NSW 2214

Telephone: 1800 805 372  
Facsimile: 1300 658 799

#### **Queensland**

Telephone: 1800 805 372  
Facsimile: 1300 658 799

#### **Victoria**

Telephone: 1800 805 372  
Facsimile: 1300 658 799

#### **South Australia**

Telephone: 1800 805 372  
Facsimile: 1300 658 799

#### **Western Australia**

Telephone: 1800 805 372  
Facsimile: 1300 658 799

#### **Asia**

Goyen Controls Co Pty Ltd  
Shanghai Representative Office  
1209 Greenland Business Centre  
1258 Yu Yuan Road  
Shanghai PC200050  
CHINA

Telephone: 86 21 5239 8810  
Facsimile: 86 21 5239 8812

Goyen Controls Co Pty Ltd  
73-M Jalan Mega Mendung  
Kompleks Bandar OUG  
58200 Kuala Lumpur MALAYSIA

Telephone: 60 37 987 6839  
Facsimile: 60 37 987 7839

#### **Office: Singapore**

Tel/Facsimile: 65 6457 4549

#### **USA**

Goyen Valve Corporation  
1195 Airport Road  
Lakewood  
New Jersey 08701  
USA

Telephone: 1 732 364 7800  
Facsimile: 1 732 364 1356

#### **Europe**

Goyen Controls Co UK Ltd  
Unit 3B Beechwood  
Chineham Business Park  
Basingstoke, Hampshire, RG24 8WA  
UNITED KINGDOM

Telephone: 44 1256 817 800  
Facsimile: 44 1256 843 164

Tyco Umwelttechnik GmbH  
Im Petersfeld 6  
D-65624 Altendiez  
GERMANY

Telephone: 49 6432 1001/1002  
Facsimile: 49 6432 63810

Mecair S.r.l.  
Via per Cinisello 97  
20054 Nova Milanese  
Milano,  
ITALY

Telephone: 39 362 375 118  
Facsimile: 39 362 375 124